

## INDUSTRIAL REMOTE ACCESS ROUTER

### Highlights

- Easy installation using customer's LAN
- Integrated WiFi, Cellular connectivity
- Firewall friendly outbound connection
- Standard ports used: 443 (HTTPS), 1194 (UDP)
- Possibility to control VPN access with external key switch
- SD card reader for easy commissioning
- USB connectivity for serial devices connectivity
- Full industrial design (24 VDC power supply, DIN rail wall mounting)




The eWON Cosy is an industrial remote access router that is designed to offer easy remote access, across the Internet, to machines and installations at customers or in the field.

With eWON Cosy, OEMs and System Integrators can troubleshoot machines, debug the PLC program, upload projects, gain remote use of an HMI or an IP camera, without going on site, drastically reducing support costs.

The eWON Cosy lets maintenance engineer establish a secure VPN connection from the machine to anywhere via Talk2M, eWON's cloud-based remote connectivity solution. The router seamlessly communicates on the local area network with the PLC and the HMI, and allows remote connection from anywhere with a simple laptop, tablet or smartphone. eWON Cosy and Talk2M make working across the Internet easy, so the user does not need to be an IT expert to take advantage of it.

### Typical Applications

- Remote access to PLC/HMI/IPC/ IP camera/...
- PLC remote maintenance

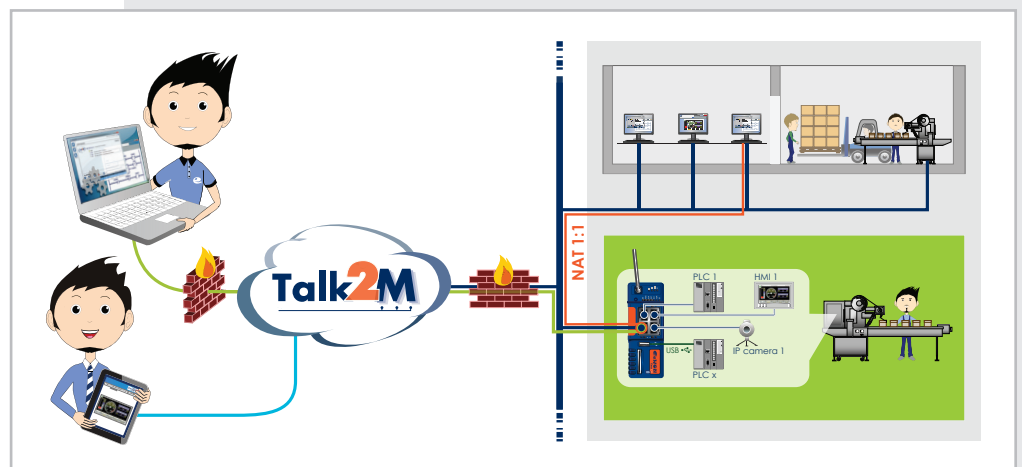

## Standards & Directives

WAN Ethernet	Configurable 0 to 3 ports 10/100 Mb Ethernet
LAN Ethernet	Configurable 1 to 4 ports 10/100Mb Ethernet
Field interface	USB ,female connector 2.0 version at full speed. Up to 10 USB connections
SD card reader	YES, for Cosy commissioning (firmware upgrade, backup, Talk2M registration)
Router	IP filtering, IP forwarding, NAT, Port forwarding, Proxy, Routing table, DHCP client/server
Internet	Outbound connection for Talk2M using HTTPS (port 443 or UDP 1194)
VPN Tunnelling	OpenVPN either in SSL or HTTPS
Talk2M	Talk2M FREE+ or Talk2M pro native support
VPN Security	VPN sessions are end-to-end encrypted using SSL/TLS protocol. Communications between the remote user and the eWON are fully encrypted using the SSL/TLS protocol, thereby ensuring data authenticity, integrity & confidentiality. Indeed, all users and eWON units are authenticated using x509 SSL certificates and end-to-end traffic is encrypted using strong symmetric & asymmetric algorithms that are part of the SSL/TLS protocol cipher suite.
Synchronization	Embedded real-time clock, manual setup via http or automatic via NTP
File Management	FTP server for configuration, firmware update
Web Site	Embedded web interface with setup wizards for configuration and maintenance (no extra software needed). Basic authentication (login/password) and session control for security.
Maintenance	SNMP and / or via FTP files
Mechanicals	Din rail or wall screw fixing system, Dimensions: 108 x 99 x 42 mm (H x D x W) 191 gr
Power supply	12-24 VDC +/-20%, LPS
Extended Temperature Range	Operating: -25°C to +70°C, 10 to 95% relative humidity (non-condensing) Storage: -40°C to +70°C, 10 to 95% relative humidity (non-condensing)
Hardware	1xDO: open drain ( MOSFET) 200mA; isolation 2.5kV, 2xDI: 0 to 24VDC; 2.5 kV isolation
Marking	CE0682, cULus listed, FCC
Warranty	24 months

## Features for the EC6133D (cellular 3G)

Frequencies	GSM/GPRS/EDGE Quad-Band (850, 900, 1800, 1900 MHz) - HSPA+ UMTS Pentaband module (800/850, 900, AWS 1700, 1900, 2100 MHz)
Antenna Connector	Type SMA - Female
Antenna	not included in the delivery
Weight	202 gr

## Features for the EC 6133C (WiFi)

WAN Connectivity	Ethernet or WiFi 802.11 b/g/n
Frequencies	Channels: 1 to 11 (inclusive)
Security	WPA2, WPA and WEP
Antenna Connector	Reverse SMA connector
Antenna	Included in the delivery; frequency: 2.4GHz; impedance: 50 Ohms, gain: 2.0dBi
Weight	199 gr

## Standards & Directives

Type tests	<p>Temperature - Operating &amp; Storage tested according to:          IEC 60068-2-1 Cold test          IEC 60068-2-2 Dry heat test          IEC 60068-2-14 Change of temperature          IEC 60068-2-30 Cyclic damp heat test</p> <p>Vibration &amp; shocks tested according to:          IEC 60068-2-27 Bumps          IEC 60068-2-64 Vibration (broad-band random)          IEC 60068-2-6 Vibration (sinusoidal)</p>
CE	<p>Compliant with:          EMC directive 2014/30/EU          RE directive 2014/53/EU          RoHS directive 2011/65/EU          REACH regulation 1907/2006</p> <p>According to standards:          EMC: ITE; emission Class A          EN55022; EN55024          EN301489-1; EN301489-7; EN301489-17; EN301489-24</p> <p>Spectrum:          EN301511; EN301908-1 &amp; -2          EN300328</p> <p>Health: EN62311          Safety: EN60950</p>
FCC	Compliant with CFR 47, part 15B Class A; 15C; 22H; 24E; 27
IC	Compliant with IC (Industry Canada) RSS-132; RSS-133; RSS-139; RS-210
Japan	This equipment has the Type Approval Certification based on the Radio Law
Safety	<p>Conform to:          EN60950-1; UL60950-1; CSA-C22.2 n° 60950-1-07          UL listed: file number# 350576          CB Certificate n° DK-42240-UL</p>

Part Number	Description
EC61330	Industrial Router COSY131 WAN/LAN/USB
EC6133D	Industrial Router COSY131 WAN/LAN/USB + Cellular 3G
EC6133C	Industrial Router COSY131 WAN/LAN/USB + WIFI

**HMS - Sweden (HQ)**  
 Tel : +46 35 17 29 00 (Halmstad HQ)  
 E-mail: sales@hms-networks.com

**HMS - Germany**  
 Tel: +49 721 989777-000  
 E-mail: ge-sales@hms-networks.com

**HMS - Switzerland**  
 Tel: +41 61 511342-0  
 E-mail: sales@hms-networks.ch

**HMS - Belgium (eWON)**  
 Tel: +32 67 895 800  
 E-mail: ewon@hms-networks.com

**HMS - India**  
 Tel: +91 83800 66578  
 E-mail: in-sales@hms-networks.com

**HMS - UK**  
 Tel: +44 1926 405599  
 E-mail: uk-sales@hms-networks.com

**HMS - China**  
 Tel : +86 010 8532 3183  
 E-mail: cn-sales@hms-networks.com

**HMS - Italy**  
 Tel : +39 039 59662 27  
 E-mail: it-sales@hms-networks.com

**HMS - United States**  
 Tel: +1 312 829 0601  
 E-mail: us-sales@hms-networks.com

**HMS - France**  
 Tel: +33 368 368 034 (Mulhouse office)  
 E-mail: fr-sales@hms-networks.com

**HMS - Japan**  
 Tel: +81 45 478 5340  
 E-mail: jp-sales@hms-networks.com